W 83069C72

D72″ H96″ L84

We are dedicated to providing the finest quality crystal chandelier for our customers. Our master craftsmen and designer pride themselves on their attention to detail. prompt,efficient service is our priority.
Enclosed,are detailed instructions on how to properly install your chandelier.Please read all instructions carefully and thoroughly.If you have any questions please fell free to call our toll free DHANDELIER HOTLINE AT:

1-855-411-8999

Crystal Dressing Instructions

W83069C72

When dressing the chandelier with the crystals please remember to wear either rubber or cotton gloves. So as to prevent any damage or smudging on the crystals.

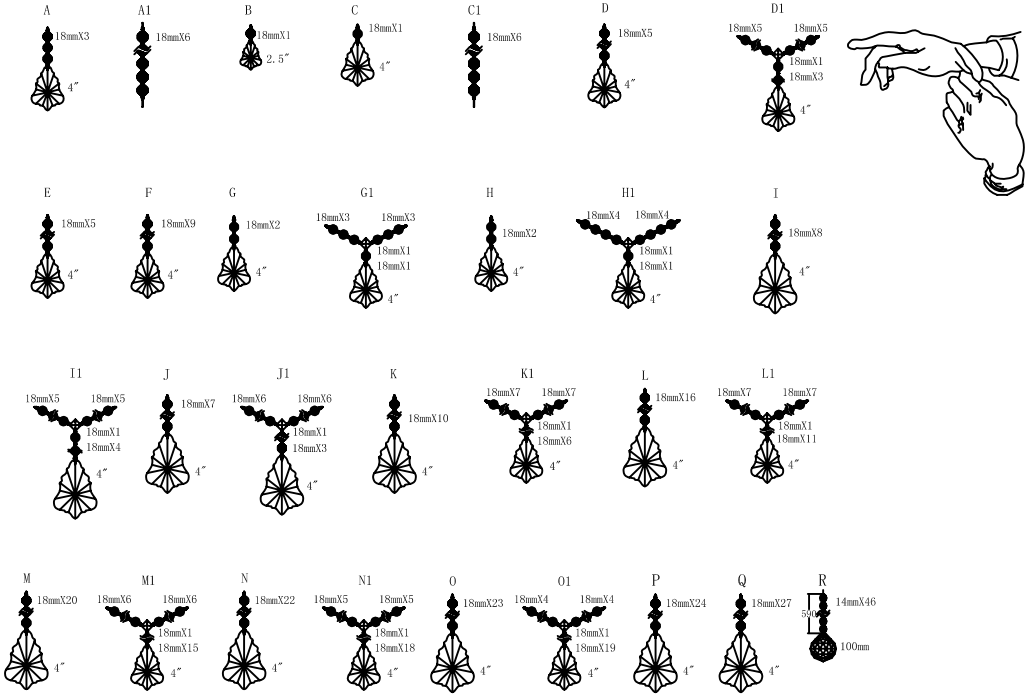

No.	Quantity	No.	Quantity	No.	Quantity	No.	Quantity
A	14strings	F	14strings	J1	14strings	N1	14strings
A1	14strings	G	14strings	K	14strings	O	14strings
B	420strings	G1	14strings	K1	14strings	O1	14strings
C	14strings	H	21strings	L	14strings	P	14strings
C1	14strings	H1	21strings	L1	14strings	Q	14strings
D	14strings	I	28strings	M	14strings	R	1string
D1	14strings	I1	28strings	M1	14strings		
E	14strings	J	28strings	N	14strings		

CANOPY PARTS LIST

Existing Electrical Box



Crossbar Screws



Crossbar Screws x 2(not srpplied)

Canopy



Glass Saucer



Chains

Wire Connector

Shrinkable tube



Cable tie



Ground Wire

CANOPY INSTALLATION DIAGRAM

W83069C72

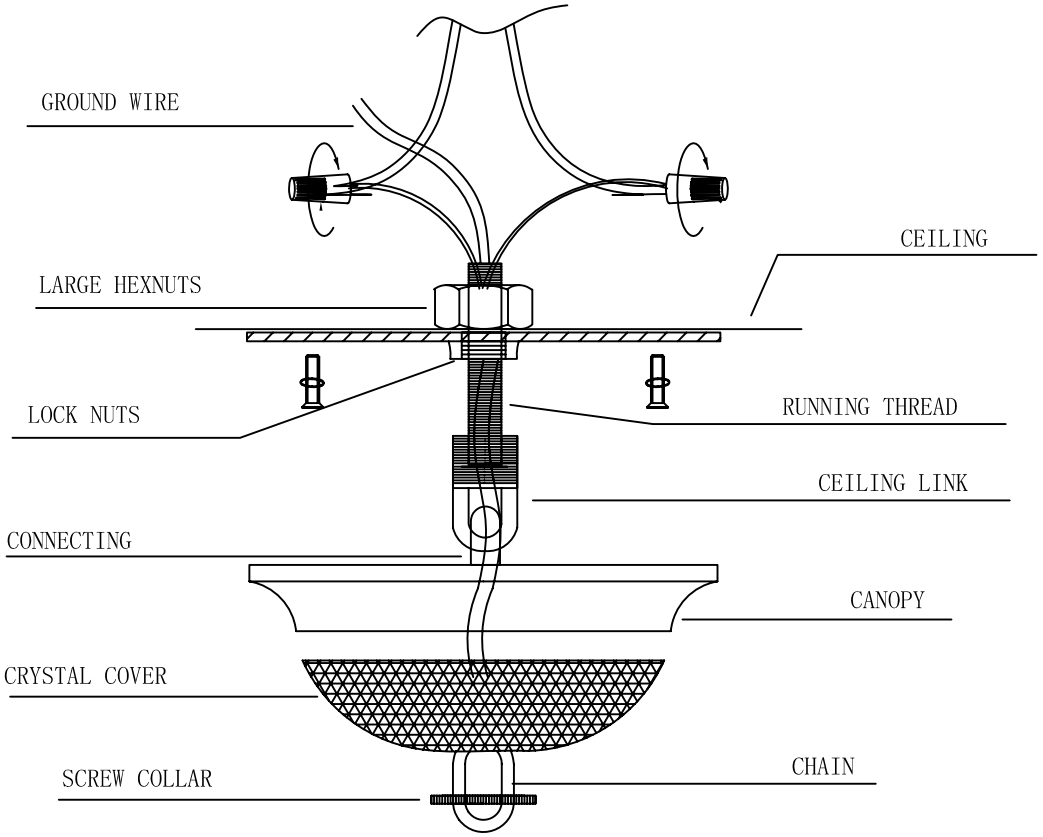

Frame Parts List

8. Install scrolls into washer with screws provided. Install arms into large arm washer. Line up holes in arms with dimple in washer. Use lock washer and nut tk secure arms in place. Connect bare ground wires in each arm to bare ground wire in center columu. Use electrical tape to secure wire nuts, NO MORE THAN 5 - WIRESPER WIRE NUT . Sufficient quantities of jumper wires and wire nuts are provided.
9. Connect white arm wires to neutral column wire(ribbed or marked is neutral). Connect blak arm wires to power wire in column. Carefully press wires as cloes as possible to the underside of washer.
10. Attach lighe assembly with lock washer adn coupling with pipe. Install 5 - C7 bulbs. Attach glass assembly with rosette and round nut.
11. Install bobeches and bulbs, connect power adn test the fixture BEFORE trimming. If any of the bulbs do NOT light - DISCONNECT POWER. Double check the wire connections.

WARNING!!!

CONTENTS ARE FRAGILE
HANDLE WITH CARE

The metal frame and crystal components of this chandelier are very delicate. Please excersise extreme Caution during unpacking and installation.

WARNING!!!

After passing the main eiectrical wire through the 10mm pipe and connecting the pipe to the main body top connector, place all remaining pieces as shown in nurmerical order and in the orientation depicted. Refer to the parts list to avoid confusion between parts. The part Numbers coincide

CAUTION

1. Rated 110v-130v/60Hz, bulb E12/40W maximum.
2. Care Should be taken to avoid damage to the surface of lighting and wire, wearing gloves is recommended when installing
3. Connect black or red wire of the lighting to live wire and white or blue wire to neutral wire and double colored(or bare copper)wire to ground wire.
4. Never install lighting on damp ceiling, the room should be dry and well ventilated.
5. Keep lighting away from acid, alkali and other corrosive chemical or gas, clean the lighting with Clean soft cloth only.
6. Installation must be carried out by qualified electrician only.
7. Disconnect the power before installing, Ceaning and replacing lighting.
8. Never cover the lighting when power is connected.
9. Firmness must be secured when installing ceiling tube、chain、pipe and other connecting parts.
10. Care should be taken to avoid damage when installing glass parts.
11. All electrical components must be installed by a licensed electrician and in accordance with the National Electrical Code and the appropriate local electrical codes. Make sure that the elecrtrical supply to the chandellier is turned off at the main fuse or circuit breaker before doing any installation Worldwide lighting shall not be responsible for unprofessional wiring.

Crystal Dressing Diagram

When dressing the chandelier with the crystals please remember to wear either rubber or cotton gloves. So as to prevent any damage or smudging on the crystals.

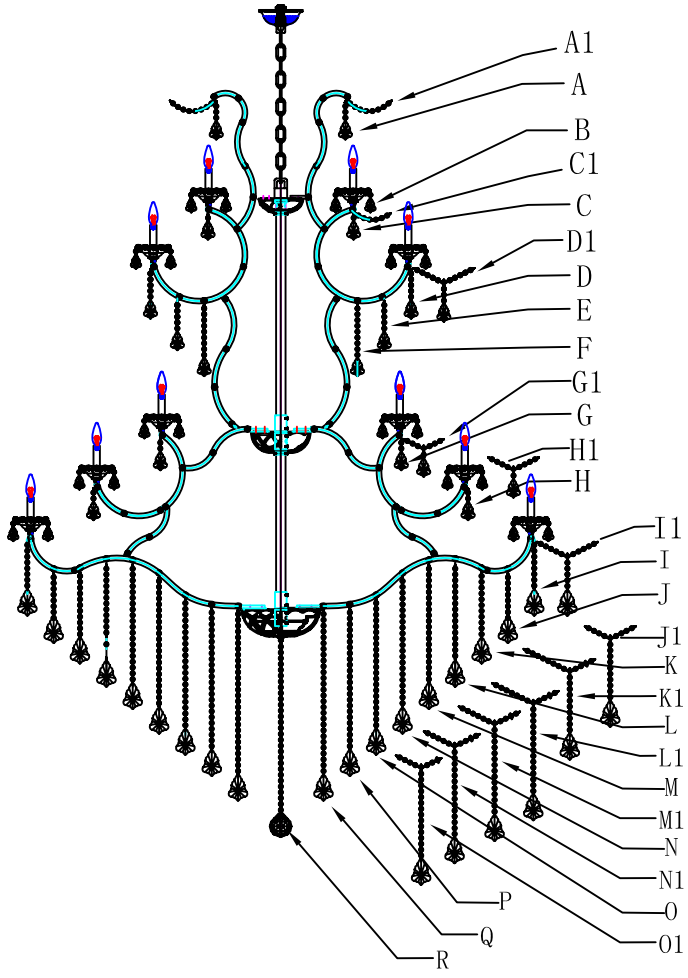

Frame Assembly Diagragram

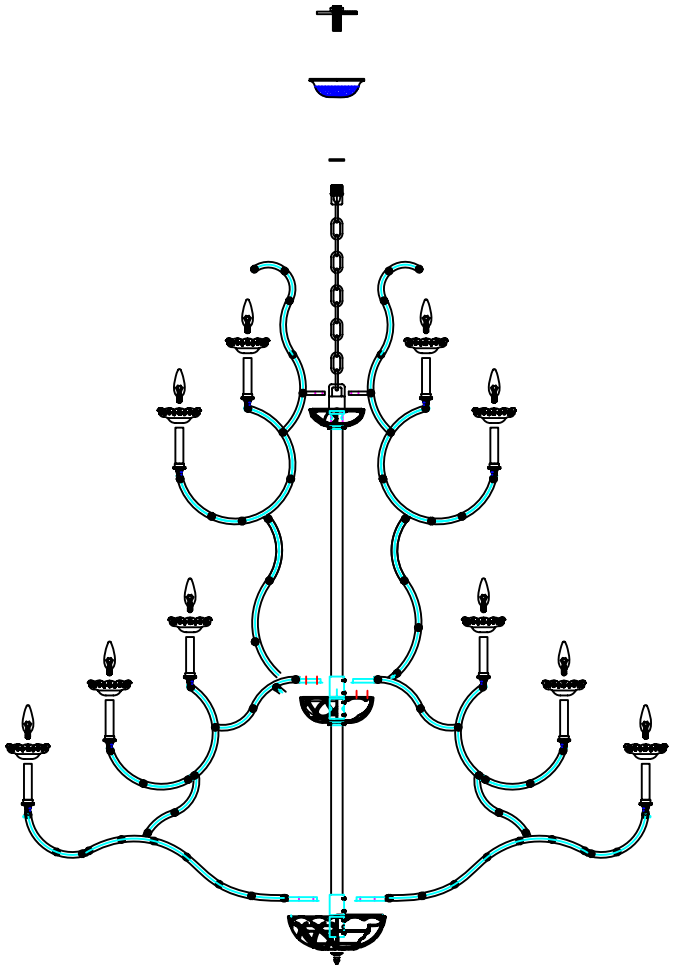

CANOPY INSTALLATION INSTRUCTIONS

2. MAKE SURE POWER IS DISCONNECTED!!
3. Attach washer to supporting member in ceiling sufficient to support weight of fixture.
4. Slip screw collar,prismatic cover and metal canopy over chain.Determine the suspension length of the fixture adn cut,if necessary.Use two connecting links to attach chain to chandelier loop and ceiling loop.
5. Insert stem wire through chain and ceiling loop.Connece wires.Fixture MUST be grounded.
6. Check distance from ceiling to loop to assure canopy assembly will be fiush against ceiling.
7. Attach canopy to ceiling with screw collar.

WARNING!!!

CONTENTS ARE FRAGILE
HANDLE WITH CARE

The metal frame and crystal components of this chandelier are very delicate. Please excersise extreme Caution during unpacking and installation.

WARNING!!!

After passing the main eiectrical wire through the 10mm pipe and connecting the pipe to the main body top connector, place all remaining pieces as shown in nurmerical order and in the orientation depicted. Refer to the parts list to avoid confusion between parts. The part Numbers coincide

CAUTION

1. Rated 110v-130v/60Hz, bulb E12/40W maximum.
2. Care Should be taken to avoid damage to the surface of lighting and wire, wearing gloves is recommended when installing
3. Connect black or red wire of the lighting to live wire and white or blue wire to neutral wire and double colored(or bare copper)wire to ground wire.
4. Never install lighting on damp ceiling, the room should be dry and well ventilated.
5. Keep lighting away from acid, alkali and other corrosive chemical or gas, clean the lighting with Clean soft cloth only.
6. Installation must be carried out by qualified electrician only.
7. Disconnect the power before installing, Ceaning and replacing lighting.
8. Never cover the lighting when power is connected.
9. Firmness must be secured when installing ceiling tube、chain、pipe and other connecting parts.
10. Care should be taken to avoid damage when installing glass parts.
11. All electrical components must be installed by a licensed electrician and in accordance with the National Electrical Code and the appropriate local electrical codes. Make sure that the elecrtrical supply to the chandellier is turned off at the main fuse or circuit breaker before doing any installation World wide lighting shall not be responsible for unprofessional wiring.

Frame Assembly Instructions

Installation:
Please read all instructions carefully.
Before you proceed to install, make sure.
that the power supply is turned off and
remains off until installation is complete.
please note that each part has been assigned a number.
please proceed in a numerical order.

1. Assembly Lamp Body(01)
2. Install Crossbar with J-Box. and then Fixed the Canopy(03)
3. Join the Lamp Body(01) and crossbar(02) with Chains(04)
4. Make sure the positive and negative charges of wire and Lamp Body(02) match correctly, screw the connect point with the junction cap.
5. Make sure the main wire is enough long and keep the rest wire in the 4″ J-box.
6. As the crystal pressing instruction, hang the crystal parts.
7. Install lighting Source

The end!